




Tip Specifications

Universal Slim Notebook Car Adapter 90W

CNBS90CAR

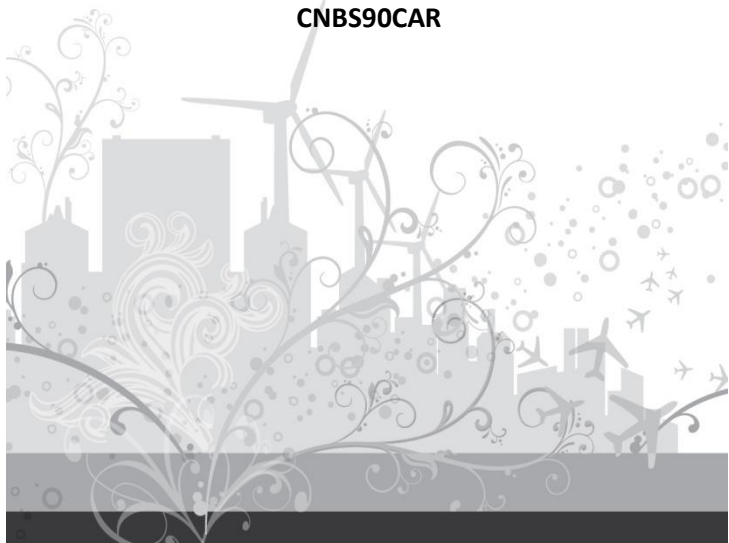

H/W V1.0

Conceptronic CNBS90CAR

Tip Specifications

The tip list below shows which tip can be used for which notebook brand.
A complete list of compatible notebook types can be found on the Conceptronic website:

Tip No.	Tip Dimension and Spec.	Output voltage	Suggested Laptop Brands
M1	6.3*3.0*12.5 mm	14.3-15.8V	Toshiba:15v/3A , 15V/4A, 15V/5A, 15V/6A NEC:15V/6A
M2	5.5*2.5*12.5 mm DC-F	15.2-16.8V	IBM:16V/2.2A, 16V/3.36A, 16V/3.5A, 16V/4.5A
M3	ø6.0*4.3*10.7mm pin1.4	15.2-16.8V	SONY:16V/3.42A, 16V/3.75A, 16V/4A FUJITSU:16V/3.36A, 16V/3.75A
M4	ø4.8*1.7*10.7mm DC-F	17.6-19.4V	HP/COMPAQ:18.5V/2.7A, 18.5V/3.5A, 18.5V/3.8A, 18.5V/4.9A DELTA:19V/2.64A ASUS: 19V/2.64A NEC:19V/2.64A
M5	ø5.5*2.5*10.7mm DC-F	18.1-20.0V	IBM:19V/3.42A ASUS:19V/4.74A LS:20V/3.25A DELL:19V/3.16A, 19V/3.42A COMPAQ/HP: 18.5V/4.9A,19V/4.9A Delta:19V/2.64A Toshiba:19V/3.16A,19V/3.42A,19V/4.74A NEC:19V/3.16A
M6	ø5.0*3.0*10.7mm pin1.0	18.1-20.0V	SAMSUNG:19V/3.16A, 19V/3.75A, 19V/4.22A, 19V/4.74A
M7	ø5.5*2.1*10.7mm DC-F	18.1-20.0V	Acer:19v/3.16A, 19V/3.42A, 19V/4.74A LiTEON:19V/3.16A, 19V/3.42A, 19V/3.16A NEC:19V/2.64A, 19V/3.16A
M8	ø6.0*4.3*10.7mm pin1.4	18.5-20.5V	SONY:19.5V/2.7A, 19.5V/3A, 19.5V/4.1A, 19.5V/4.7A FUJITSU:19V/3.16A, 19V/3.69A, 19V/4.22A
M9	ø7.4*5.0*12.5mm pin0.6	18.5-20.5V	DELL:19.5V/3.34A, 19.5V/4.62A
M12	ø7.4*5.0*12.5mm pin0.6	17.6-19.4V	HP/COMPAQ:18.5V/3.5A, 18.5V/4.94A HP Ultrabook envy 13t spectre series:18.5V/3.5A