


Cambiar puerto de escucha

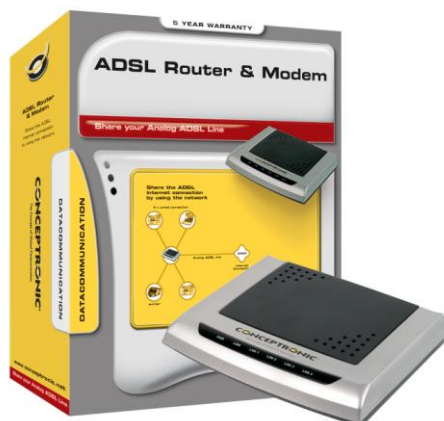

Si su servidor WEB y la página de configuración del router tienen el mismo puerto de escucha (80), necesitará cambiar el puerto de escucha del router:

Cambie el puerto de escucha o desactive la opción **remote administration** por ejemplo al puerto 81.

Para tener acceso externo necesitará usar la IP más el Puerto, por ejemplo: <http://80.32.107.24:81>

Para tener acceso desde la misma red puede utilizar la IP: <http://192.168.1.254:81>

En la siguiente imagen podrá ver como cambiar estos parámetros.

Configuration -> Advanced -> Misc Configuration

En el campo **HTTP Server Port** al 81

Pulse **SUBMIT** y para finalizar **SAVE CONFIG**

The screenshot displays the web configuration interface for a Conceptronic ADSL CPE. The browser address bar shows 'http://192.168.1.254/doc/index.htm'. The interface has a sidebar menu on the left with options like 'Status', 'Quick Start', 'Configuration', 'WAN', 'LAN', 'System', 'Firewall', 'Virtual Server', 'Advanced', 'ADSL', 'DNS', 'Dynamic DNS', 'NAT', 'RIP', 'Static Route', 'Misc Configuration', 'Diagnostic Test', and 'Save Config'. The main content area is titled 'Miscellaneous Configuration' and contains a table of parameters. The 'HTTP Server Port' is set to 81. At the bottom of the interface, there are 'SAVE CONFIG' and 'RESTART' buttons.

Parameters	
HTTP Server Access	<input type="radio"/> All <input checked="" type="radio"/> Restricted
<input checked="" type="checkbox"/> LAN	
<input checked="" type="checkbox"/> WAN Specify IP	192.168.1.10
Subnet Mask	255.255.255.0
HTTP Server Port	81
HTTP Password Protection	Enabled
FTP Server	Enabled
	<input checked="" type="checkbox"/> Disable WAN side FTP access
TFTP Server	Disabled
DMZ	Disabled
DMZ Host IP	0.0.0.0
IGMP Proxy	Disabled
PPP Half Bridge	Disabled
PPP Reconnect on WAN Access	Disabled
Connect PPP when ADSL link is up	Enabled
ADSL Status Refresh Rate (seconds)	2
UPnP	Enabled